



# BOOM MOWER

for

## KOMATSU®

### WA200PT



Approved Attachment Bid #55229  
California Dept. of General Services  
Procurement Division

DURABILITY INNOVATION  
COMMITMENT

# Features



**Quick Detachable Design**



**Helac-allows the flail cutter head to be positioned parallel to tractor**



**Frame mounted weight eliminates wheel weights**




Additional tractor requirements: Auxiliary Hydraulic Pump, Auxiliary Hydraulic Cooler, Additional Frame Weights.

# Specification

A:	Reach Out	23' 3"
B:	Reach Down	12' 9"
C:	Reach Out @Max. Down	13' 6"
D:	Reach Out @Max. Up	9' 8"
E:	Reach Up	19' 0"
F:	Reach In	7' 2"

Travel Width 8' 6" with boom in stow position  
Counter Weight 2000 lbs, frame mounted

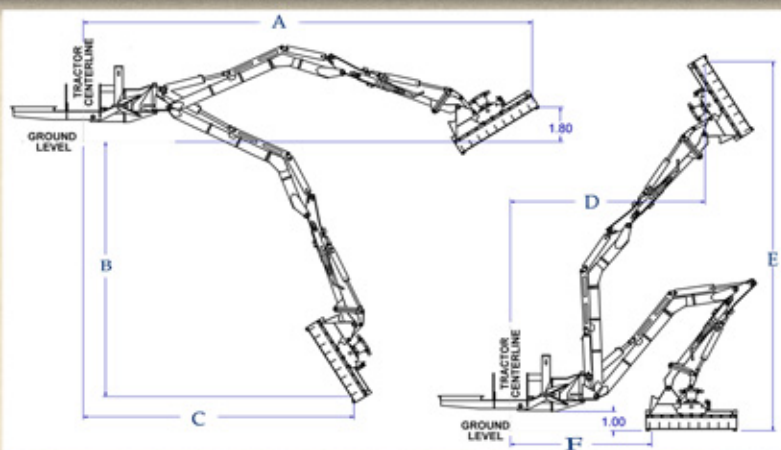

## ROTARY:

Cutter Width	50" Actual Cut
Cutter Housing	110,000 PSI Steel
Cutter Assembly	One-Piece Spun Formed Disc with forged spindle housing assembly
Blades	Two full swinging 5/8" steel blades.



## FLAIL:

Cutter Width	50" Actual Cut
Cutter Housing	100,000 PSI Steel
Side Plates	3/8" 110,000 PSI Steel
Cutter Knives	18 knives, 3.4 lbs per knife
Cutter RPM	2,140



Specifications are subject to change.  
Optional equipment maybe shown.  
Meets all applicable ANSI/SAE test standards  
WWW.TIGER-MOWERS.COM

TIGER CORPORATION  
3301 N Louise Ave.  
Sioux Falls, SD 57107  
1-800-843-6849