




# Rear Boom Mowers



DURABILITY INNOVATION  
COMMITMENT

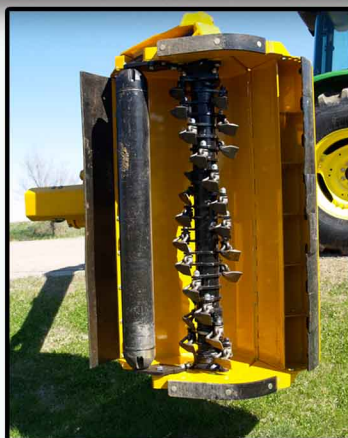

The Tiger RBM 16 & 20 rear mounted boom mowers feature a totally independent PTO powered hydraulic drive system capable of delivering 54 HP of cutting performance. Designed for Cat II 3 point hitch systems, the RBM series uses a five lever cable control system for maximum operator cutterhead control and performance. The RBM series features a swing system that adds an extra level of maneuverability when cutting with a 60" rotary cutter or a 47" flail cutter.

## KNIFE OPTIONS

### ROTARY

5/8" Thick, Double Edged  
(up to 4" dia)



### GRASS

Grass & Light Brush  
(up to 1 1/2" dia)



### UNIVERSAL

Grass & Medium Brush  
(up to 2.5" dia)



### HEDGE

Brush Only  
(up to 4.0" dia)



Specifications	RBM 16	RBM 20
Tractor HP / Weight (min)	65 PTO HP / 7500 lbs	75 PTO HP / 9000 lbs
Machine Weight w/ Flail	2433 lbs	3045 lbs
Hydraulic System	Totally Independent	Totally Independent
Hyd Reservoir Capacity	50 gallon	52 gallon
Attachment Method	3 PT. Cat. II	3 PT. Cat. II
Controls	Cable Controlled	Cable Controlled
Reach Out, Horizontal	15' 6"	19' 8"
Reach Up, Vertical	19' 4"	23' 6"
Reach Down @ 45°	8' 9"	8' 9"
Flail Cutter Width (Grass)	47"	47"
(Brush)	47"	47"
Rotary Cutter Width	60"	60"
Breakaway	Hydraulic	Hydraulic



Five Lever Cable Controls



An Alamo Group Company  
© 2011 Tiger Corporation, All Rights Reserved, Printed in the USA

Tiger Corporation  
3301 North Louise Ave  
Sioux Falls, South Dakota 57107  
800-843-6849  
www.tigermowers.com

Dealer Info: